



企业网站



企业公众号



业务咨询

汕头市昇德自动化设备有限公司
SHANTOU SHENGDE AUTOMATION EQUIPMENT CO.,LTD.

广东昇德智能装备科技有限公司

📍 汕头市金平区赤窖大道潮汕路旁四十亩片四栋之二
2nd Floor, Building 4, Forty acres, Chijiao Avenue, Jinping District, Shantou City.

☎ +86-0754-87262386 ✉ 730336348@qq.com

<http://stdzn.com>

<http://电工胶带.中国>


<http://昇德.com>

<http://胶带包装机.中国>

<http://昇德.中国>

<http://电工胶带包装机.中国>

<http://www.tapepackaging.com>

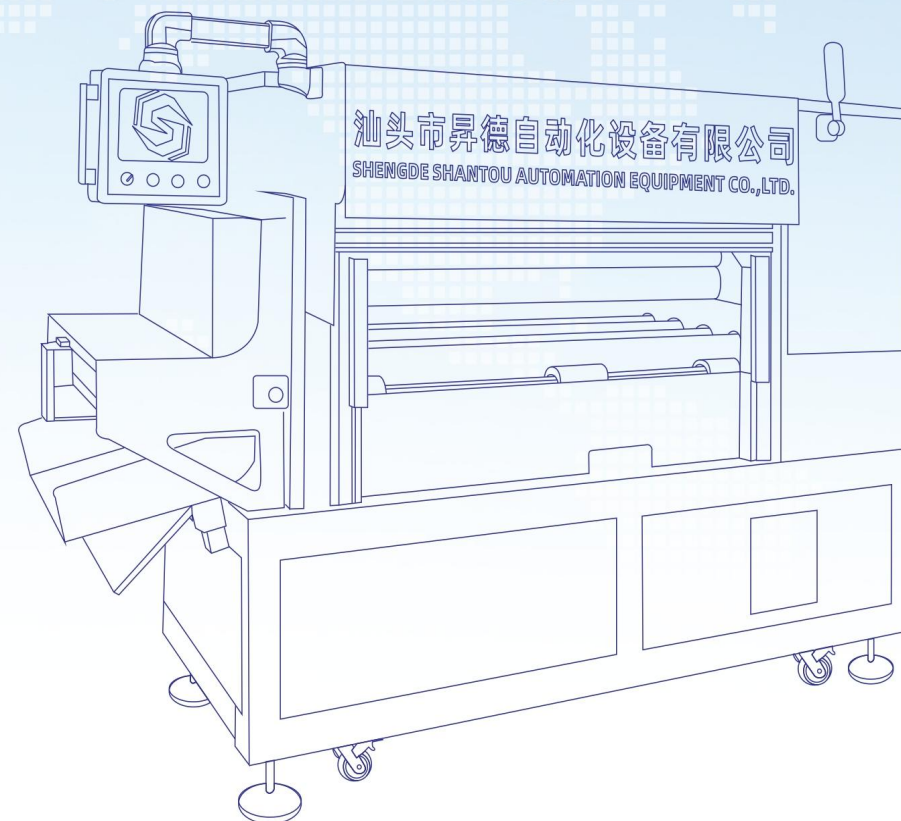

汕头市昇德自动化设备有限公司
SHENGDE SHANTOU AUTOMATION EQUIPMENT CO.,LTD.



<http://昇德.com>

企业简介

COMPANY PROFILE

汕头市昇德自动化设备有限公司，是一家专业电工胶带，布基胶带，美纹纸胶带，bopp胶带，地板胶带，管道胶带，全自动切纸管机等外包装自动化设备，销售，售后服务为一体的企业。公司以“快速”、“可靠”、“稳定”为核心价值，为许多客户提供了好性能，可靠的产品和服务，本设备已经在胶粘带外包装行业，得到广大客户的好评及信赖，我们的产品已经销往各地。

昇德本着“质量保证，诚信服务，及时到位”的做事态度长期以往的服务于每一位新老客户。在此，感谢新老客户的长期支持，因为您的关注我们将更加专注。

ShanTou ShengDe Automation Equipment Co., Ltd. is a professional electrical tape, cloth tape, masking tape, bopp tape, floor tape, duct tape, automatic paper cutter and other outer packaging automation equipment, sales, after-sales service for One enterprise. The company takes "fast", "reliable" and "stable" as its core values, and provides many customers with good performance and reliable products and services. This equipment has been used in the adhesive tape packaging industry and has won praise and trust from customers. Our products have been sold all over the world.

ShengDe has been serving every new and old customer for a long time in line with the attitude of "quality assurance, honest service, timely delivery". Here, thank new and old customers for their long-term support, because of your attention we will be more focused.



SHENGDEAUTOMATION

OUR MISSION

质量方针

Quality Creates Value

诚信 · 专业 · 进取



品质可靠，取源于制造者的责任

PERFECT QUALITY COMES FROM THE RESPONSIBILITY OF THE MANUFACTURER



获得多项实用型外观专利

成就客户——致力于客户的满意与成功
诚信正直——诚信尽责，知行合一
标准求实——基于事实的决策与业务管理





昇德®

http://胶带包装机.中国

专利号: ZL 2022 2 0358275. 2/ZL 2022 2 0359457. 1/ZL 2022 3 0084876. 4

SD-F001

四轴全自动数控切纸管机

Four-axis automatic CNC paper cutter



多刀同步切管



安全光栅
自动报警



自动分离料头料尾

一键智能 | 低能耗 | 稳定性 | 自动分条

- 不同规格无需换刀（输入参数即可）。
 - 料头料尾自动排除。
 - 故障报警自动停机。
 - 无线远程APP监控及系统升级。
 - 纸管厚度可调。
 - 占地面积小，耗电量低。
 - 操作简单，维护方便。
- There is no need to change the tool for different specifications (just input the parameters).
 - The material head and material tail are automatically excluded.
 - Automatic shutdown after failure alarm.
 - Wireless remote APP monitoring and system upgrade.
 - The thickness of the paper tube is adjustable.
 - Small footprint and low power consumption.
 - Simple operation and convenient maintenance.

型号	SD-F001	切管速度Cutting speed	20-40刀/分钟	电源 Total power	4P AC380V
气压Air pressure	0.5-0.6Mpa	切管内尺寸范围 Cut tube size range	76-79mm	切管有效长度 Cut tube long	1260-1330mm
功率 Total power	2.5kw/H	机器尺寸 Outside dimensions	长2550*宽850 *高1750mm	整机重量 Gross weight	750kg



昇德®

http://胶带包装机.中国

专利号: ZL 2022 2 0358275. 2/ZL 2022 2 0359457. 1/ZL 2022 3 0084876. 4

SD-77HM

胶带单卷热收缩膜包装机

Tape Single Roll Heat Shrink Film Packaging Machine



一键智能 | 低能耗 | 稳定性

- 人机界面，微电脑可编程控制。
 - 故障自动报警，一键智能操作。
 - 机械手吸纸标。
 - 恒温可调节温度控制系统。
 - 低能耗。
 - 模具更换方便快捷。
 - 转盘结构，小巧轻便。
 - 伺服电机传动。
 - 印刷膜及纸卡功能双用。
- Man-machine interface, programmable control of micro-computer.
 - Automatic fault alarm, one key intelligent operation.
 - High-precision mechanical hand paper-sucking label.
 - Constant temperature adjustable temperature control system.
 - Low energy consumption and high efficiency.
 - Could replacement is convenient and fast.
 - Turntable structure, compact and portable.
 - Servo motor, high precision transmission.

用途: 各种胶带收缩膜+纸卡包装。

Usage: All kinds of tape shrinkage film + paper card packaging.

包装最高速度 Maximum speed of packaging	45-60pcs/分钟	电压 Voltage	AC380V-4P	包装膜厚度 Thickness of roll film	0.04mm-0.045mm (收缩率50%)
包装宽度 Packing width	15-50mm	总功率 Total power	6kw/h	设备尺寸 Dimensions	长1600mm*宽1600mm *高2200mm
包装直径 Packing diameter	90-130mm(可非标定做)	气压 Air Consumption	0.5mps	总重量 Weight	1000kg



昇德®

<http://胶带包装机.中国>

SD-GS500

缠绕膜无芯复卷机 Coreless Stretch Film Rewinding Machine



一键智能 |
 低能耗 |
 稳定性

1. 人机界面，微电脑控制系统
2. 自动复卷、切割，自动计数（长度和重量）
3. 高效复卷母卷，产出外观、质量、规格上高品质的产品
4. 适用于PE拉伸膜等各种薄膜，高速复卷
5. 操作简单，易于维护

1. The man-machine interface, microcomputer control system.
2. Automatic counting (length & weight), processing, cutting, winding and weighing.
3. High - quality rewinding from jumbo roll in terms of appearance, quality and technical spec.
4. Suitable for various films like PE stretch film, etc. with high - speed production.
5. Simple operation, easy maintenance

成品宽度 Products Width	20-500mm	母卷直径 Mother Roll Diameter	500mm	子卷宽度 Finished Product Width	500mm
制品厚度 Products Thickness	0.012-0.08mm	母卷最大宽度 Max Mother Roll Width	500mm	子卷直径 Finished Product Diameter	200mm
最大运行速度 Max Operating Speed	550m/min	母卷卷芯规格 Core Specifications	74*550mm	机器外形尺寸 Machine Dimensions	1920*1800*1100mm

专利号: ZL 201720456709.1/ZL 201910488749.8/ZL 201920846007.3/ZL202021994391.0/ZL202021992760.2



SD- 120T/SD- 50T

全自动生料带压盖机

Fully automatic Teflon tape capping machine

全自动生料带套膜收缩包装机

Fully automatic Teflon tape heat shrink packaging machine



一键智能 |
 低能耗 |
 稳定性 |
 自动分条

1. 塑料盖视觉系统自动检测方向。
2. 自动识别有料压料。
3. 故障报警自动停机。
4. 无线远程APP监控及系统升级。
5. 效率高，维护方便。

1. The plastic cap visual system automatically detects the direction.
2. Automatic recognition of material pressing.
3. Fault alarm and automatic shutdown.
4. Wireless remote APP monitoring and system upgrade.
5. High efficiency and easy maintenance.

型号	SD-120T+SD-50T	速度 speed	0-120pcs	产品宽度 Product width	10-20mm
功率 Total power	7.5kw/H	包装直径（定做模具） Packaging diameter (customized mold)	55-90mm	整机重量 Gross weight	3000kg
机器尺寸 Outside dimensions	12000*1500*2200mm				

<http://www.sdznzb.com>

05/06



昇德®

http://胶带包装机.中国

专利号: ZL 2022 2 0358275. 2/ZL 2022 2 0359457. 1/ZL 2022 3 0084876. 4

SD- 60SS+SD-1060+SD-4522

全自动电工胶带套膜收缩包装生产线

Automatic Electrical Tape Coating Shrinkage Packaging Production Line



一键智能 | 低能耗 | 稳定性

1. 人机界面，微电脑可编程控制
2. 故障自动报警，一键智能操作
3. 自动放纸卡功能
4. 低能耗，高效能
5. 不同产品更换模具，调节方便
6. 印刷膜/标签纸卡功能一键切换

1. Man-machine interface, microcomputer programmable control
2. Automatic fault alarm, one key intelligent operation
3. Automatic paper card release function
4. Low energy consumption, high efficiency
5. Different products replace mold, easy to adjust
6. Switch the printing film/label paper card function with one click



专利号: ZL 201720456709.1/ZL 201910488749.8/ZL 201920846007.3/ZL202021994391.0/ZL202021992760.2



SD- 65MB / SD1060 / SD4520

全自动高速多功能折角电工胶带包装机

Fully automatic high-speed multifunctional folding electrical tape packaging machine



一键智能 | 低能耗 | 稳定性

1. 人机界面，微电脑可编程控制
2. 故障自动报警，一键智能操作
3. 自动放纸卡功能
4. 低能耗，高效能
5. 不同产品更换模具，调节方便
6. 印刷膜/标签纸卡功能一键切换

1. Man-machine interface, microcomputer programmable control
2. Automatic fault alarm, one key intelligent operation
3. Automatic paper card release function
4. Low energy consumption, high efficiency
5. Different products replace mold, easy to adjust
6. Switch the printing film/label paper card function with one click




昇德®

http://电工胶带.中国

专利号: ZL 201720456709.1/ZL 201910488749.8/ZL 201920846007.3/ZL202021994391.0/ZL202021992760.2

SD- 800 / 900

半自动单卷套膜热收缩包装机 Semi-automatic single roll film heat shrink packaging machine

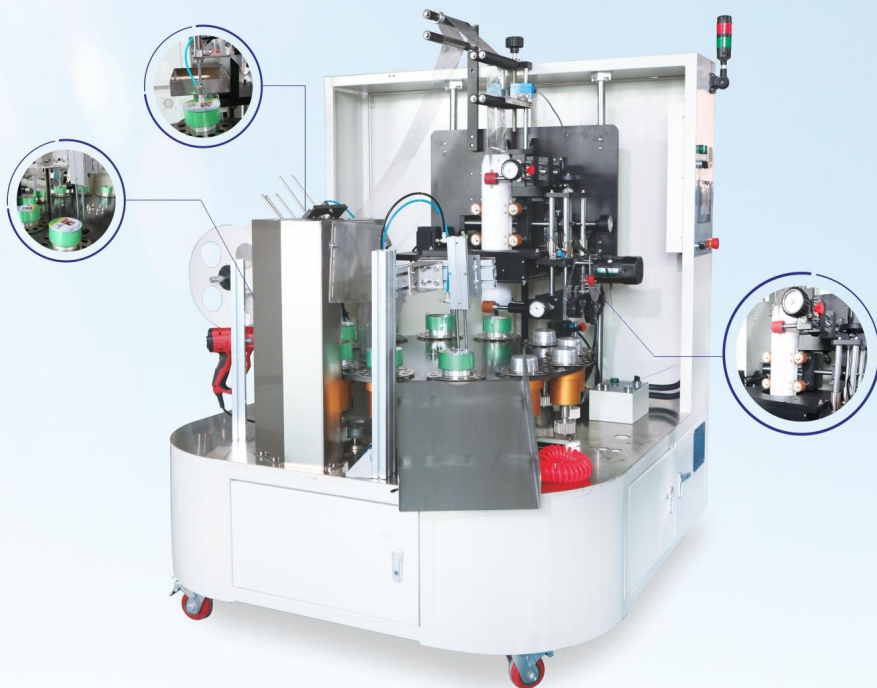

一键智能 | 低能耗 | 稳定性 | 自动分条

- 1.不同直径规格更换相应模具，模块化设计，应用服务广。
- 2.不同高度规格可调。
- 3.故障报警自动停机。
- 4.无线远程APP监控及系统升级。
- 5.彩膜和透明膜膜可选择独立开启。
- 6.自动吸放纸卡。
- 7.占地面积小，耗电量低。
- 8.操作简单，维护方便。

用途：本机适用圆形产品单个套膜热收缩包装。

1. Different diameter specifications to replace the corresponding mold, modular design, wide application services.
2. Different height specifications can be adjusted.
3. The machine will stop automatically when the fault alarm is generated.
4. Wireless remote APP monitoring and system upgrade.
5. Color film and transparent film can be opened independently.
6. Automatic suction and release paper card.
7. Small footprint and low power consumption.
8. Simple operation and easy maintenance.

Purpose: This machine is suitable for circular product single film heat shrink packaging.

包装速度Packing speed	0-55个/分钟	电源 Total power	4P AC380V	产品宽度范围 Product width range	15-150mm (根据客户需求定做)
气压Air pressure	0.5-0.6Mpa	纸管内尺寸范围 Paper tube size range	76-79mm 可定做	产品直径范围 Product diameter range	50-90mm 90-145mm (根据客户需求定做)
功率 Total power	4.5kw/H	整机重量 Gross weight	850kg	机器尺寸 Outside dimensions	长1500*宽1500*高1900mm

专利号: ZL 201720456709.1/ZL 201910488749.8/ZL 201920846007.3/ZL202021994391.0/ZL202021992760.2



SD- 60SS/SD-60ST

电工胶带单个热收缩膜全自动包装机 Automatic packaging machine for single shrink film of electrical tape



一键智能 | 低能耗 | 稳定性

- 1.人机界面，微电脑可编程控制。
- 2.故障自动报警，一键智能操作。
- 3.机械手吸纸标。
- 4.恒温可调节温度控制系统。
- 5.低能耗。
- 6.模具更换方便快捷。
- 7.转盘结构，小巧轻便。
- 8.伺服电机传动。

用途：各种胶带收缩膜+纸卡包装。

1. Man-machine interface, programmable control of micro-computer.
2. Automatic fault alarm, one key intelligent operation.
3. High-precision mechanical hand paper-sucking label.
4. Constant temperature adjustable temperature control system.
5. Low energy consumption and high efficiency.
6. Could replacement is convenient and fast.
7. Turntable structure, compact and portable.
8. Servo motor, high precision transmission.

Usage: All kinds of tape shrinkage film + paper card packaging.

包装最高速度 Maximum speed of packaging	60-68pcs/分钟	电压 Voltage	AC380V AC220V单相	包装膜厚度 Thickness of roll film	0.035mm-0.04mm (收缩率50%)
包装宽度 Packing width	15-50mm	总功率 Total power	4.5kw/h	设备尺寸 Dimensions	长1.5m*宽1.5m*高1.85m
包装直径 Packing diameter	52mm-98mm (可非标定做)	气压 Air Consumption	0.5mps	总重量 Weight	1000kg



昇德®

http://电工胶带包装机.中国

专利号: ZL 201720456709.1/ZL 201910488749.8/ZL 201920846007.3/ZL202021994391.0/ZL202021992760.2

SD- 65MB

电工胶带多功能高速折角包装机

Electrical tape multifunctional high-speed folding corner packaging machine



一键智能 | 低能耗 | 稳定性 | 自动分条

1. 人机界面，微电脑可编程控制。
2. 故障自动报警，一键智能操作。
3. 低能耗，高效能。
4. 不同产品模具更换便捷。

本机适用圆形产品套膜带放标签收缩功能。

用途: PVC电工胶带折角收缩包装。

1. Man-machine interface, programmable control of micro-computer.
 2. Automatic fault alarm, one key intelligent open action.
 3. Low energy consumption and high efficiency.
 4. It is convenient to change the molds of different products.
- This machine is used for circular products covering film with label systolic function.

Usage: PVC electrical tape folding shrinkage packaging.

包装最高速度 Maximum speed of packaging	60-65pcs/分钟	电压 Voltage	AC380V AC220V单相	包装膜厚度 Thickness of roll film	0.015-0.02mm
包装宽度 Packing width	15-25mm	总功率 Total power	0.75kw/h	设备尺寸 Dimensions	长2.7m*宽1.0m*高1.5m
包装直径 Packaging diameter	50mm-80mm (可非标定做)	气压 Air Consumption	0.5mps	总重量 Weight	600kg



专利号: ZL 201720456709.1/ZL 201910488749.8/ZL 201920846007.3/ZL202021994391.0/ZL202021992760.2

SD- 45S/75S

全自动压缩毛巾袜子包装机

Fully automatic compression towel/sock packaging machine



一键智能 | 低能耗 | 稳定性

1. 人机操作系统，智能控制
2. 智能异常报警提示
3. 自动放上下标签
4. 自动机械手取放料
5. 自动机械手取料出料
6. 自动理料盘理料排列7. 无料无标自动报警

1. Man-machine operating system, intelligent control
2. Intelligent abnormal alarm warning
3. Automatically place the upper and lower labels
4. Automatic manipulator to take and place materials
5. Automatic manipulator takes out materials
6. Automatic material arrangement



贴标速度 Labeling speed	0-50pcs/分钟	电压 Voltage	4P-AC-380V
产品宽度 Product width	10-50mm 根据客户需求定做	总重量 Weight	950kg
产品直径 Product diameter	45-75mm 根据客户需求定做	耗电量 Power consumption	3.5kw/H



昇德®

http://昇德.com

专利号: ZL 201720456709.1/ZL 201910488749.8/ZL 201920846007.3/ZL202021994391.0/ZL202021992760.2

专利号: ZL 201720456709.1/ZL 201910488749.8/ZL 201920846007.3/ZL202021994391.0/ZL202021992760.2



SD- 1060+SD4520

电工胶带整列筒包装机

Electrical tape the whole column tube packing machine



一键智能 | 低能耗 | 稳定性

- 1.人机界面，微电脑控制系统
- 2.故障自动报警，一键启动
- 3.低耗能 高效率
- 4.不良品自动筛选功能，（可选择）
- 5.多功能调节设计，方便不同规格无需更换膜具，简单快捷

适用范围：

胶带产品整列，圆形产品整列，带自动袖口包装功能。

1. The man-machine interface, microcomputer control system
2. Automatic fault alarm, a key to start
3. Low energy efficiency
4. Bad product automatic filter function,
5. multi-function control design, convenient different specifications without membrane replacement, simple and quick

Scope of application:

Tape the whole column, circular products whole column, with the function of automatic sleeve packaging.

适用包装膜 Suitable packaging film	小于350mm	电源 Total power	220v 50-60HZ	适用包装膜 Apply to shrink film	POF,PE
产品直径范围 product range	50x90mm	功率 Total power	0.75KW	机器尺寸 Machine size	2980*980*1650 (L*W*H)
速度 speed	5-8筒/分钟	工作气压 Air Consumption	4-6kg/cm ²	机器重量 Machine weight	280KG

SD-XK450

全自动袖口筒包装机

Automatic cuff tube packing machine



一键智能 | 低能耗 | 稳定性

1. PLC可编程控制系统
2. 人机智能操作系统
3. 恒温可调节温控系统
4. 低耗能，高效率
5. 可调节推料结构
6. 有料自动检测运行功能

1. PLC programmable control system.
2. Human-machine intelligent operating system.
3. Constant temperature adjustable temperature control system.
4. Low energy consumption, high efficiency.
5. Adjustable pusher structure.
6. Automatic detection and running function of materials.

最高包装尺寸 The highest package sizes	小于200mm	推进板负荷 Propulsion plate load	25kg	适用收缩膜 Apply to shrink film	POF, PVC, PE
最宽包装尺寸 The most wide package sizes	小于400mm	电压 Voltage	220V, 50-60Hz	膜宽/厚度 Film width / thickness	Max, 450mm 0.03-0.25mm
包装速度 packaging speed	0-20pcs/minute	总功率 Total power	0.6kw/h	机器外型尺寸 Outside dimensions	L1200mm*W1000mm H1750mm
封切时间 Sealing time	0.3-0.9Second	气压 Air Consumption	4-6kg/cm ²	机器重量 Gross weight	120kg

http://www.sdznzb.com

21/22



昇德®

http://昇德.com

专利号: ZL 201720456709.1/ZL 201910488749.8/ZL 201920846007.3/ZL202021994391.0/ZL202021992760.2



SD-BL450 (密接)

全自动封切套膜包装机

Automatic sealing, cutting, sleeve packaging machine



一键智能 | 低能耗 | 稳定性

封口牢固, 抗高温不粘膜;
智能感应包装, 采用光电自动感应自动检测包装物品;
节省人工, 货品包装作业由机器代替人工完成;
自动卷料, 自动卷取材料;


Sealing firm, high temperature resistance without mucous membrane;
Intelligent induction packaging, using photoelectric automatic induction automatic detection of packaging items;
Save labor, goods packaging operations by machines instead of manual completion;
Automatic winding, automatic winding material;

生产能力 Production capacity	10-30pus/min	电源Total power	220/50-60HZ	封口线尺寸 Sealing line size	长度45 高度 45CM (卷膜展开尺寸)
气压 Air Consumption	≥0.5	切刀功率Total power	1.5KW	机器尺寸 Dimensions	长1760*宽890*高1450mm
包装高度 Packing highly	15CM高度以下	功率Total power	2.35KW		

SD-LY450

平板包装自动理料线

Automatic material handling line for flat packaging

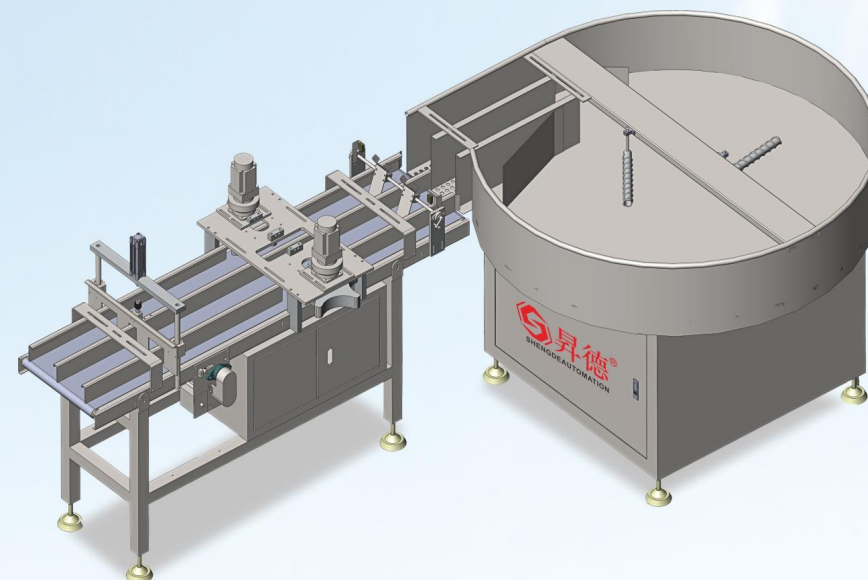

一键智能 | 低能耗 | 稳定性

1. 人机界面, 微电脑可编程控制
2. 故障自动报警, 一键智能操作
3. 单排或多排一键切换
4. 不同规格更换方便, 调节简单
5. 伺服电机卡放更稳定

1. Human machine interface, microcomputer programmable control
2. Automatic fault alarm, one click intelligent operation
3. One click switching between single or multiple rows
4. Easy to replace with different specifications and easy to adjust
5. The servo motor has a more stable speed calculation

速度 speed	0-120pcs	产品宽度 Product width	12-60mm	功率 Total power	2.5kw/H
包装直径 Packaging diameter	95-160mm	总重量 Weight	500kg	设备尺寸 Dimensions	300*1700*1400mm



SD- 350

三伺服智能枕式包装机

3 Servo Horizontal Flow Wrap Packing Machine



适用范围

适用于包各种不规则物品及固态物体。针对五金、电器、开关、小商品、日化、化工等行业。

Applications:

It Is Suitable For Packing Irregular Articles And Solid Objects For Hardware, Electrical Applications, Switches, Small Commodities, Daily Necessities, Chemical And Other Industries.

包装材料 Packaging materials PP, CPP, PVC, PS, EVA, PET, PVDC+PVC, OPP/CPP等

包装规格长 Package Length	100-500 mm	包装速度 Packing Speed	30-120 Bags/min	总功率 General Power	2.8 KW
包装规格宽 Package Width	35-140 mm	包装膜宽 Film Size	90-350 mm	整机重量 Weight Of Machine	260 Kg
包装规格高 Package Height	5-60 mm	电源类型 Type of Power Supply	220V 50Hz	整机尺寸 Dimension	3550x880x1100 mm

SD- 450

三伺服智能枕式包装机

3 Servo Horizontal Flow Wrap Packing Machine



适用范围

适用于包各种不规则物品及固态物体。针对五金、电器、开关、小商品、日化、化工等行业。

Applications:

It Is Suitable For Packing Irregular Articles And Solid Objects For Hardware, Electrical Applications, Switches, Small Commodities, Daily Necessities, Chemical And Other Industries.

包装材料 Packaging materials PP, CPP, PVC, PS, EVA, PET, PVDC+PVC, OPP/CPP等

包装规格长 Package Length	100-500 mm	包装速度 Packing Speed	30-100 Bags/min	总功率 General Power	4.1 KW
包装规格宽 Package Width	35-120 mm	包装膜宽 Film Size	90-450 mm	整机重量 Weight Of Machine	260 Kg
包装规格高 Package Height	5-60 mm	电源类型 Type of Power Supply	220V 50Hz	整机尺寸 Dimension	3640x960x1100 mm

SD- 500

下走膜三伺服包装机

Three servo packing machine under



适用范围

适合于电工胶带、美纹纸、双面胶带、泡棉胶带、五金配件、玩具、蔬菜、异性产品外包装等。

Applications:

Suitable for electrical tape, textured paper, double-sided tape, Foam tape, hardware accessories, toys, vegetables, Members of the opposite sex product packaging, etc

包装材料 OPP, OPP/PE, OPP/CPP Packaging materials OPP, OPP/PE, OPP/CPP

包装膜宽度 Film Width	≤500mm	制袋宽度 Bag width	50-200mm	使用电源 Total power	220V, 50Hz, 4.0KW
卷膜尺寸 Roll film size	Maxφ ≤ 300mm	产品高度 Product height	5-65mm	机器尺寸 Dimensions	L4035*W960*H1400mm
包装速度 Packing Speed	0-120pcs/分	制袋长度 Bag length	80-1000mm	整机重量 Weight	550kg

SD- 4522

下送风内循环收缩机

Downward air supply internal circulation contraction machine





输送材质 Conveying material: 网带.链辊.特氟龙

输送速度 transporting velocity	0-15m/min	电源 Total power	380V/4P	收缩炉尺寸 Shrinkage furnace size	长1200x宽400x高150mm
产品尺寸 Packing bag size	宽L350x高W150mm	输送载重 Conveying load	20kg max	机器尺寸 Dimensions	长1600x宽560x高660mm
适用收缩膜 Apply to shrink film	POF, PVC, PE.	功率 Total power	6KW	整机重量 Weight	180kg



SD-50T

医疗绷带肌肉贴热收缩包装机 Medical Bandage Sports Tape Heat Shrink Film Packing Machine

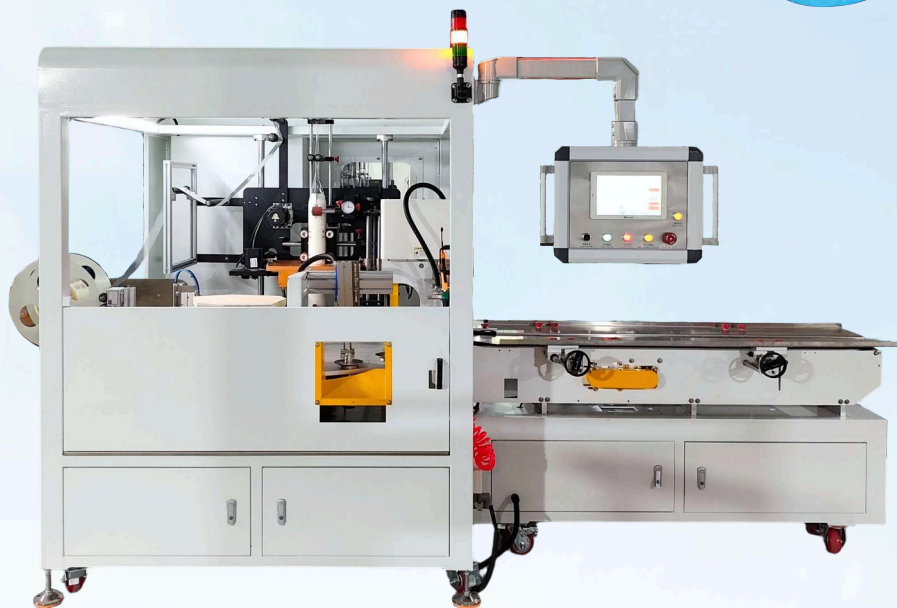

一键智能 | 低能耗 | 稳定性

- | | |
|------------------|---|
| 1.人机界面，微电脑可编程操作 | 1.Human-machine interface, microcomputer programmable control |
| 2.故障自动报警，一键智能操作 | 2.Automatic fault alarm, one-key intelligent operation |
| 3.低能耗收缩设计装置，降低成本 | 3.Low-energy shrink design reduces costs |
| 4.更换不同产品方便快捷 | 4.Quick and convenient mold replacement |
| 5.圆盘结构设计，占地小操作简单 | 5.Disc structure, compact and lightweight |
| 6.智能悬臂人机操作系统 | 6.Intelligent cantilever human-machine operating system |
| 7.恒温可调节温度控制系统 | 7.Constant and adjustable temperature control system |

包装速度 Packing speed	0-50pcs/min	气压 Use Air Source	5-7Kg/cm ²	包装尺寸范围 Packaging size range	直径Φ50-135 宽度 25-75mm
输送台高度 Conveyor height	750+50mm(可调)	功率 Total power	7.5KW/h	机器尺寸 Dimensions	1500*1500*2100mm
电源 Total power	4P AC380 50-60HZ	机器重量 Machine weight	1000KG		

SD-30KGA

协作码垛机 Collaborative Palletizer



一键智能 | 低能耗 | 稳定性

- | | |
|--|--|
| 1.易用性：图形化编程操作，15寸高灵敏电容式触摸屏 | 1.Easy to operate: Visual programming is simple and efficient, 15 inch high sensitive capacitive touch screen |
| 2.灵活性：5分钟内可设置新的路径；每分钟可堆垛8-12个箱子；最多可设置800个码垛路径；可同时堆垛2种产品；带有标签方向功能 | 2.Flexible deployment: New path set-up within 5 minutes; 8-12 boxes can be palletized per minute; Up to 800 palletizing paths can be set; Two products can be palletized simultaneously; With label orientation function |
| 3.便携移动式底座，应用更方便；第七轴升降柱 | 3.Flexible operation: Portable mobile base for more convenient application, 7th axle lifting column |


码垛高度 Palletize Height	最高：2100mm	机器人负载 Robot load	30KG	设备运行占地面积 Equipment Operating Area	3150*1716mm
码垛速度 Palletizing Speed	<9pcs/min	工作半径 Working radius	1900mm	重复定位精度 Repeat Positioning Accuracy	±0.04mm
重量 Weight	约350kg	电压 Voltage	单相 AC 220V 50HZ	占地面积 Floor Area	1505*1716mm

SD-K20BXX

全自动伺服开箱机 Automatic Servo Unpacking Machine



成型封底



一键智能 | 低能耗 | 稳定性

1. 操作简单，性能稳定
2. 低能耗，易维护
3. 有无胶带及无纸板箱报警功能
4. 储箱机构：可储存约50个未成型的纸箱
5. 伺服控制，适应不同的材质纸箱
6. 纸箱规格可储存，触摸屏调用参数，一键启动

耗气量 Air Consumption	280NL/min	成型速度 Forming Speed	5-15箱/分钟 可调	功率 Power	1.9KW
适用纸箱 Applicable Carton	L280-500*W180-400*H150-400mm	开箱方式 Unboxing method	立式伺服成型	气压 Use Air Source	5-6Kg/cm ²
胶带宽度 Tape Width	48-72mm	电压 Voltage	220V 50HZ	机器尺寸 Dimensions	L2035*W1901*H1545mm

SD-FC500+SD-FG755L

全自动工字型封箱机 Automatic I-shaped Box Sealing Machine



封箱顺序



一键智能 | 低能耗 | 稳定性

1. 自动折盖“一”字型封箱机与四角边“工”字型封箱机连机配套
2. 采用L式连机流程，标准机L型方向为面对入口向左拐
3. 适合同一时间内多种规格纸箱使用，变换规格时全自动调整宽度及高度
4. 贴带器结构精密坚固，运转柔顺，使用寿命长

台面高度 Table Height	600-650mm (可调)	输送速度 Transfer Speed	20米/分 (6-8箱/分)	重量 Weight	约650kg
适用纸箱 Applicable Carton	L340-700*W200-500*H180-500mm (可根据客户需求定制)	耗气量 Air Consumption	100NL/min	气压 Use Air Source	4-6Kg/cm ²
胶带宽度 Tape Width	48-72mm	电压 Voltage	220V 50HZ	机器尺寸 Dimensions	L3050xW1950xH1510mm